

# CELLAR SAVER Model CS 2029 Specifications

Copy page to your files for reference

[RETURN TO HOME PAGE](#)

Overall height.....4 1/2"

Overall width.....3 "

Total width in alarm...3 9/16" mode


Width of base.....3/4 "

Top of base holds standard 3/8 press fit contact.

Swing-arm top has 1/4 " magnet encased in rust resistant coating.

Swing-arm bottom has inverted air-lock float.

Shipped with an eleven inch tie-wrap for mounting on vertical flow pipe in sump well.

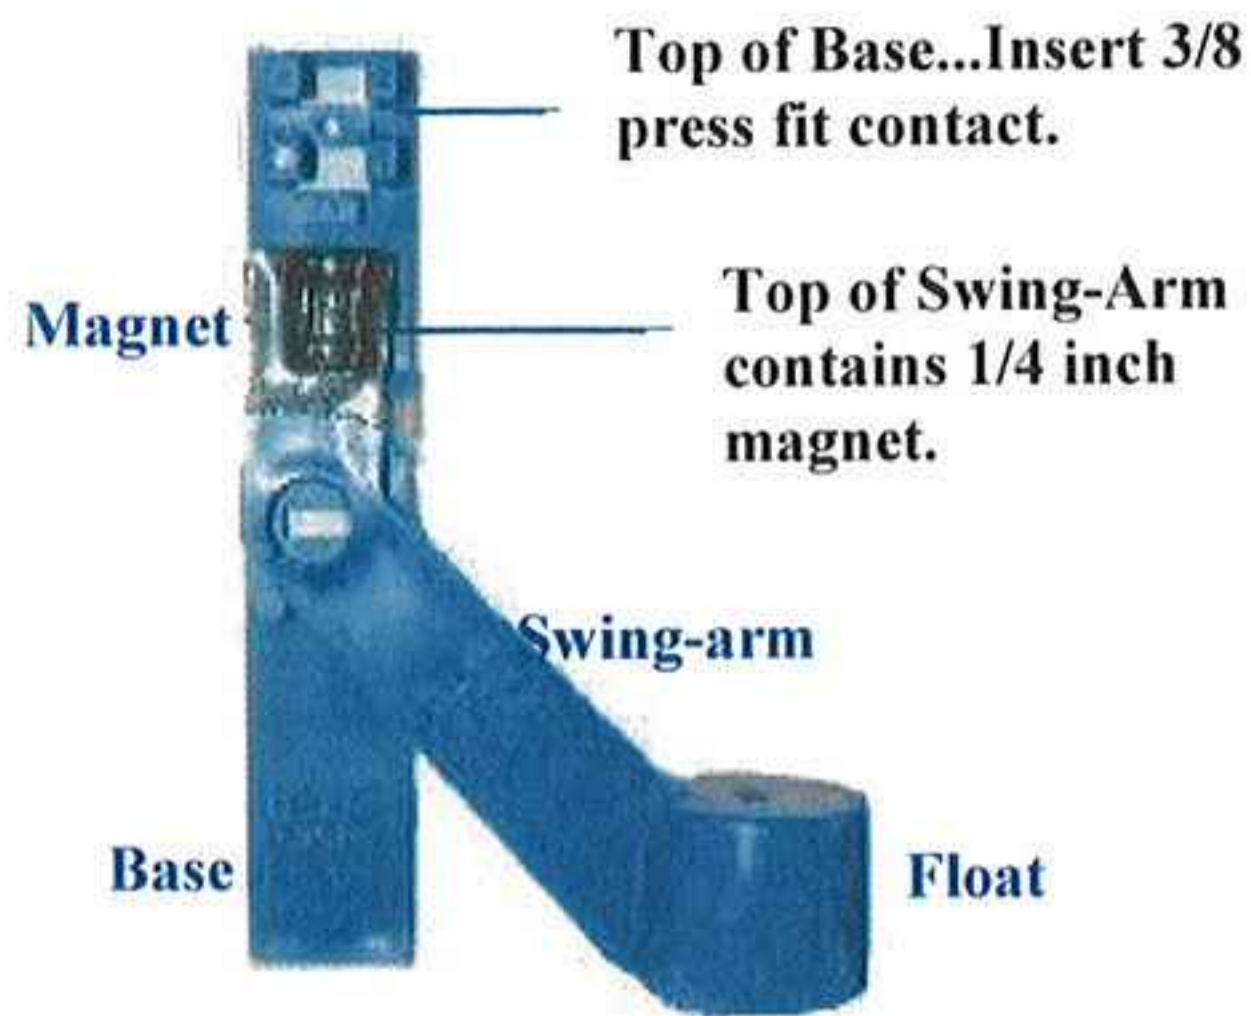

## OPTIONAL MOUNTING ABILITY

By using the molded in mounting boss and screw hole located on the upper rear portion of the Base, you can attach standard pipe strapping to the Cellar Saver and mount it just about anywhere you like. One idea is placing it on a board across the sump well opening. (see below).

Board placed over sump well with CS 2029 attached by pipe strapping. You can either attach it with a 4 x 1/4 screw or hot glue.

### Upper rear of CS 2029 Base



Rear view with pipe strapping attached

