



IntelliKnight® 5808 Single Loop Addressable Fire Alarm Control System



The convenience of an addressable fire alarm control panel in a cost-effective easy to use package.

IntelliKnight Model 5808 is a 127 point class leading single loop addressable fire alarm control/communicator system. 5808 provides you with the revolutionary value and performance of addressable sensing technology combined with exclusive, built-in digital communication,

distributed intelligent power, easy to use interface. Powerful features such as drift compensation and maintenance alert are delivered in this powerful FACP from Silent Knight.

For more information about the IntelliKnight system, or to locate your nearest source, please call 1-800-446-6444, or in Minnesota, call 763-493-6435.

Description

5808 performs drift compensation and calibration checks on each of the sensors in the system.

The basic 5808 system can be enhanced by adding modules such as 5860 remote annunciator, 5824 serial/parallel printer interface module (for printing system reports), and 5496 intelligent power module. 5808 also features a powerful built-in dual line fire communicator that allows for reporting of all system activity to a remote monitoring location.

Features

- Up to 127 addressable points
- Up to 125 zones and 125 output groups
- Uses standard wire—no shielded or twisted pair required
- Built-in digital communicator
- Central station reporting by point or by zone
- Supports Class B (Style 4) and Class A (Style 6 or 7) configuration for SLC
- Distributed, intelligent power
- Drift compensation
- 13 pre-programmed output cadences, (including ANSI-3.41), and 4 programmable outputs
- Notification circuits can be configured as 2 Class A (Style Z) or 4 Class B (Style Y), or auxiliary power for resettable, constant, or door holder power
- Built-in annunciator with 80-character LCD display
- RS-485 bus provides communication to system accessories
- Built-in RS-232 and USB interface for programming via a PC
- Upload or download programming, event history, or detector status via remote or direct connection
- Improvements in SKSS deliver five times faster upload/downloads

- Built-in synchronization for appliances from AMSECO, Gentex®, Faraday, System Sensor®, and Wheelock®
- One Form C trouble relay rated at 2.5A at 27.4 VDC and two Form C programmable relays rated at 2.5A at 27.4 VDC
- Programmable date setting for Daylight Saving Time
- Plex-2 door option combines a dead front cabinet door with a clear window, limiting access to the panel while providing single button operation of the reset and silence functions

Electrical Specifications

Primary AC: 120 VRMS at 50/60 Hz, 2.75A

Total Accessory Load: 6A @ 27.4 VDC

Notification Power: 6A @ 27.4 VDC, power-limited

Standby Current: 170 mA

Alarm Current: 325 mA

Notification & Auxiliary Circuits:

3A @ 27.4 VDC per circuit, power-limited

Battery Charging Capacity: 7.0-35.0 AH

Battery Size: 18 AH max. allowed in FACP. Larger capacity batteries can be housed in an RBB accessory cabinet

Mechanical Specifications

Flush Mount Dimensions:

14.5" W x 24.75" H x 3.5" D
(36.8 W x 62.9 H x 8.73 D cm)

Overall Dimensions:

16" W x 26.4" H x 4.65" D
(40.6 W x 67 H x 11.8 D cm)

Weight: 28 lbs. (12.8 kg)

Color: Red

Telephone Requirements:



Model 5808

FCC Part 15 and Part 68 approved
Type of Jack: RJ31X (two required)

Approvals

NFPA 13, NFPA 15, NFPA 16, NFPA 70, & NFPA 72: Central Station; Remote Signalling; Local Protective Signalling Systems; Auxiliary Protected Premises Unit; & Water Deluge Releasing Service. Suitable for automatic, manual, waterflow, sprinkler supervisory (DACT non-coded) signalling services.

Other Approvals: UL Listed;
CSFM 7170-0559: 142;
MEA 429-92-E Vol. XIV



**SILENT
KNIGHT**

by Honeywell

SLC Detectors

SD505-APS

Addressable photoelectric smoke detector.

SD505-AIS

Addressable ionization smoke detector.

SD505-AHS

Absolute temperature heat detector that goes into alarm immediately if the temperature exceeds the programmable trip point. Trip point range from 135°F–150°F(0°C–37°C).

SD505-6AB

Six inch base for use with detector heads SD505-APS, SD505-AIS and SD505-AHS.

SD505-4AB

Four inch base for use with detector heads SD505-APS, SD505-AIS, and SD505-AHS.

SD505-6SB

Six-inch sounder base for use with existing sensor and base. Operates in single and multi-station modes and/or as a system sounder. Requires 2 additional wires for power.

SD505-6IB

Short circuit isolator base for SD505-APS, SD505-AIS, and SD505-AHS detectors.

SD505-6RB

Six-inch relay base for use with existing sensor and base. Provides one Form C contact.

SD505-ADH

Duct housing that detects smoke in HVAC ducts.

SD505-ADHR

Duct detector base with relay. Provides Form C alarm contact. For use with SD505-APS and SD505-AIS sensors. Compatible with SD505-DTS remote test switch.

SD500-PS/SD500-PSDA

SD500-PS is a single action pull station and SD500-PSDA is a dual action pull station.

SLC Modules

Model SD500-AIM

Dry contact input module for use with normally open dry contacts. It features an indicator LED to show alarm status.

SD500-MIM

Mini dry contact input module is a small version of the SD500-AIM. For use with pull stations and other normally open dry contact inputs.

SD500-ANM

Addressable notification module providing a single Class A or Class B notification circuit on the SLC.

SD500-ARM

Addressable relay module that features two Form C output relays. Provides indicator LED to show output status.

SD500-SDM

Two-wire detector input module. Allows for the connection of conventional 2-wire detectors on the SLC loop. Requires two additional wires for power.

SD500-LIM

A short circuit isolator module for SLC devices. When a short occurs on the SLC loop, it is detected as a trouble, but all SLC devices protected by the isolator module continue to operate.

SD500-LED

An LED driver capable of driving 80 LEDs through the SLC loop. Up to 40 SD500-LEDs can be used per system.

S-BUS Accessories

5860/R Remote Fire Annunciator

Features the same 80 character backlit LCD display keypad and firefighter's key switch as the 5808. 5860 is gray and 5860R is red.

5496 Intelligent Power Module

A 6 amp notification power expander that provides four additional power-limited notification appliance circuit outputs.

5880 LED/IO Module

Features 40 LED outputs, 8 normally open dry contact inputs and one piezo output.



5865-3 and 5865-4 Remote LED Annunciator
Features 30

programmable LED (15 red and 15 yellow) outputs and a piezo sounder. The 5865-4 adds a silence and reset switch to the package.

5883 Relay Board

Features 10 general purpose Form C relays. Used with 5880 module.

5824 Serial/Parallel Printer Interface Module

Provides one parallel and one RS-232 serial port for connecting a printer to 5808. Use to print a real-time log of system events, detector status reports, and event history.

Miscellaneous Accessories

5660 Silent Knight Software Suite

PC-base software for FACP programming. Upload and view panel account information, event history, and detector status.

5670 Silent Knight Software Suite

End-user facility management software allows viewing of detector status and event history via modem or direct connection.

Plex-2 Door


Dead front cabinet door with clear window to limit access to the FACP.

RBB

Remote Battery Box Accessory Cabinet. Use if backup batteries are too large to fit into FACP cabinet. Dimensions: 16" W x 10" H x 6" D (406 mm W x 254 mm H x 152 mm D)

SD505-DTS

Remote test switch that provides remote key operated test function and annunciation of detector alarm with SD505-ADHR.

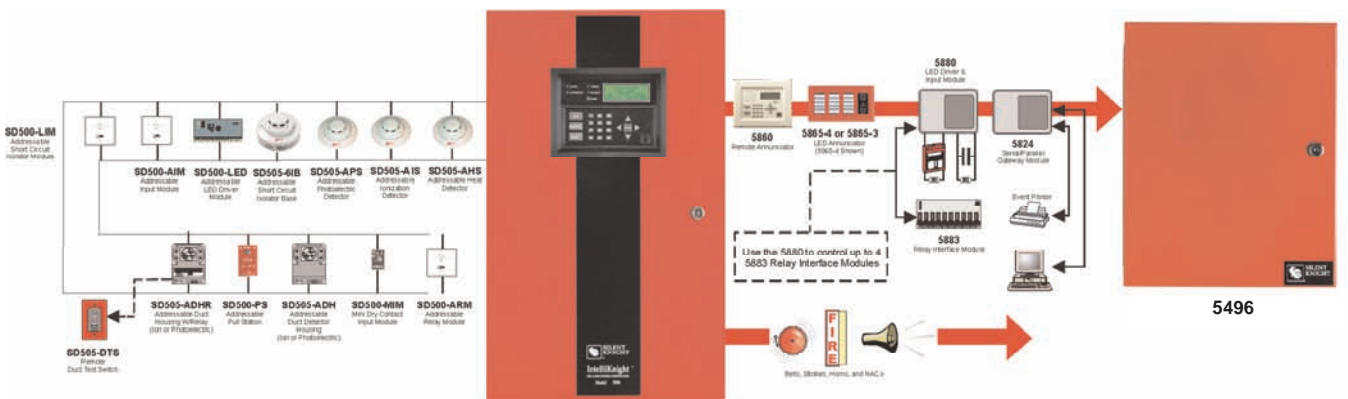

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 7550 Meridian Circle Suite 100, Maple Grove, Mn 55369-4927. Phone: (800) 328-0103, Fax: (763) 493-6475.

MADE IN AMERICA
FORM# 350386 Rev. D 04/06
Copyright © 2006 Silent Knight

IntelliKnight & JumpStart are Registered Trademarks of Silent Knight
Flexput is a Trademark of Silent Knight