



SK-5235 Remote Annunciator



Program and Operate the SK-5208 FACP from a Distance with the SK-5235 Remote Annunciator.

The SK-5235 remote annunciator provides remote annunciation for the SK-5208 Fire Alarm Control Panel. The SK-5235 performs all system operations. It also provides trouble and alarm information and can be used for programming. The SK-5208 can support up to six 5235 Remote Annunciators.

Operation

When the system is normal and receiving AC power, the power LED is on and all other LEDs are off. Other LEDs turn on as the conditions occur.

Users identify themselves to the control panel by entering a code on the annunciator. When a user presses a button, the annunciator piezo beeps and the LCD prompts the user to enter a code or other relevant information.

Features

- 2-line 16-character LCD display
- Indicates Trouble, Alarm, Supervisory, and System Status conditions with LEDs and LCD display
- Each SK-5235 is individually supervised by the SK-5208 FACP
- Up to 6 per SK-5208 FACP
- Operation and appearance comparable to the control panel's on-board annunciator
- Can be wired up to 1500 ft from FACP
- OPR operator's key ships with SK-5235, this key can be used to perform user operations, but will not open the control panel door



SK-5235 Remote Annunciator

Specifications

Operating Voltage:	24 VDC
Current Draw:	
Standby:	30 mA
Alarm:	50 mA
Dimensions:	
Width:	7-3/16" (18.26 cm)
Height:	5" (12.7 cm)
Depth:	1-1/8" (2.86 cm)
Operating Temp:	32° to 120° F (0° to 49° C)
Maximum Wiring Distance:	1500ft

Approvals

- MEA 429-92-E
- CSFM 7165-0559:137
- UL Listed

Ordering Information

SK5235
Remote Annunciator

Compatible Products

SK5208
Fire Alarm Control Panel




SK-5235 Remote Annunciator



Engineering Specifications

The contractor shall furnish and install where indicated on the plans, the Model SK-5235 Remote Annunciator. Module shall be of a LCD type with a 2X16 display. Module shall be capable of remote programming as well as providing alarm, trouble information along with resetting of alarms and silencing of trouble and alarm conditions. Module ID shall be programmed with a 4 position DIP. The control shall be capable of supporting up to 6 supervised SK-5235. Module shall be designed to mount on a dual gang electrical box with 18 gauge to 14 gauge wire.

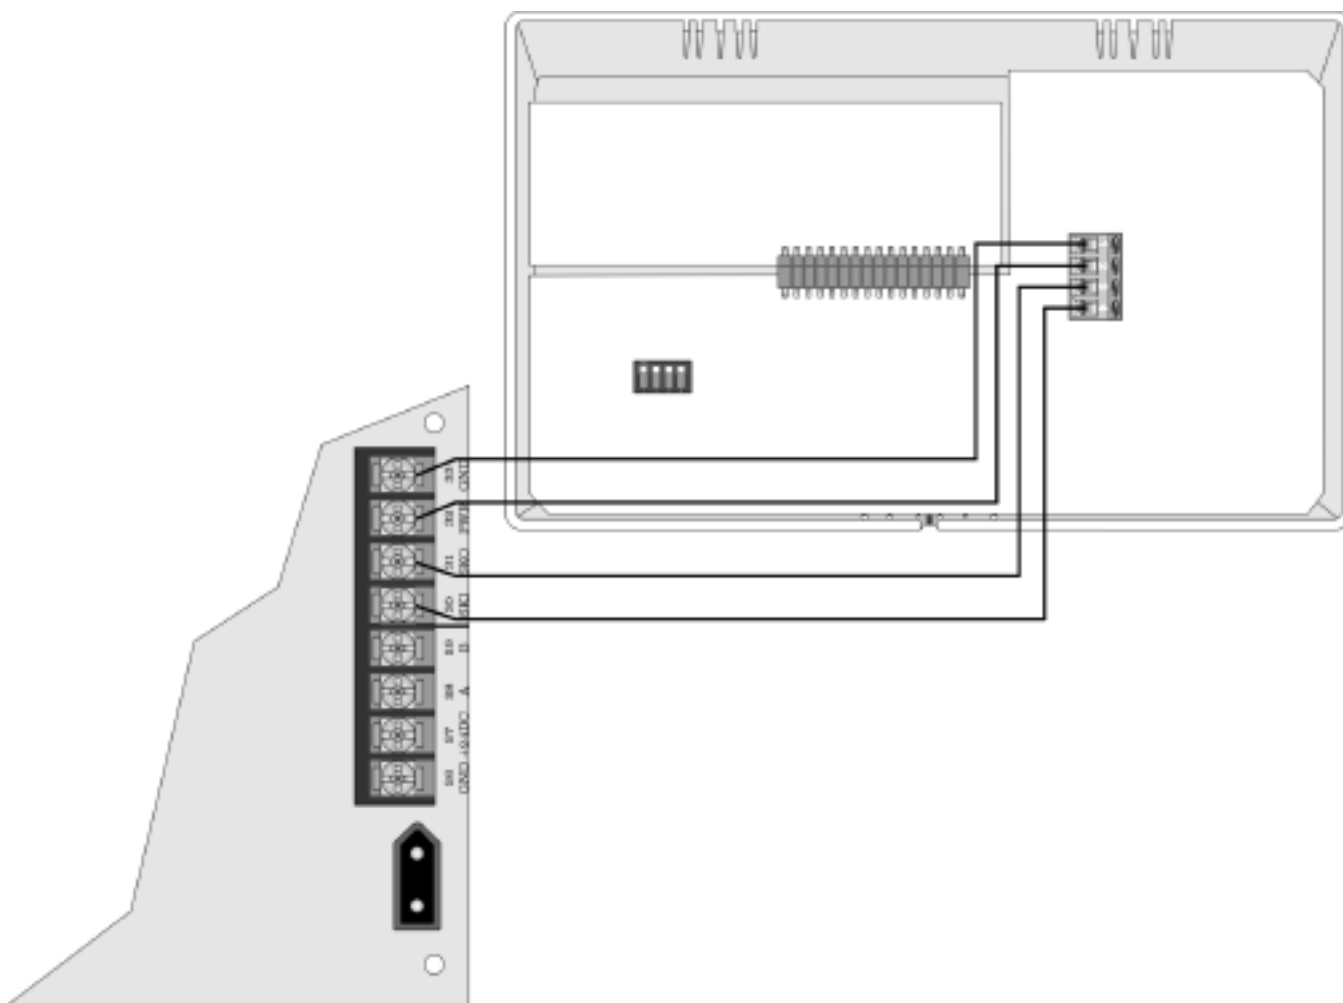

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 7550 Meridian Circle Suite 100, Maple Grove, Mn 55369-4927. Phone: (800) 328-0103, Fax: (763) 493-6475.

MADE IN AMERICA
FORM# 350321 Rev B 1/07
Copyright © 2007 Silent Knight