

6271C TouchCenter

COLOR GRAPHIC TOUCHSCREEN KEYPAD



With its large, customizable color touchscreen, Honeywell's 6271C TouchCenter keypad has been designed to help dealers close more sales and increase retention. Dealers can opt to increase their advertising exposure by displaying their company name or logo on the homescreen and increase end-user referrals by putting a picture and name of the homeowner's family on a bright, colorful interface.

The 6271C touchscreen keypad makes it easier than ever for end-users to take advantage of their security system features. Even the most advanced functions are simple, with graphics and menu driven prompts guiding the user every step of the way.

FEATURES

- Customizable homescreen for dealers or end-users*
- Large, bright colorful display
- External MMC card slot for fast homescreen customization or software upgrades
- Intuitive touchscreen display with icons and menu driven prompts
- Entry/Exit Delay countdown displayed
- Authorized end-user can add or delete user codes
- View entire zone list with status of each zone
- End-user can quickly bypass zones from zone list




Custom Dealer Screen



Custom End-User Screen



Arm Screen

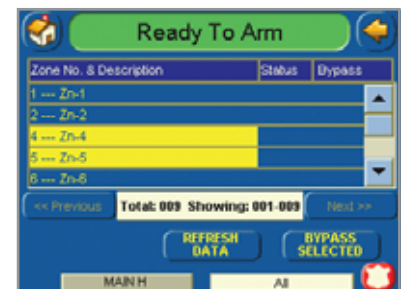

Bypass Zones

*Requires software download from <https://library.ademconet.com/MyWebTech/MyWebTech.aspx?an=fp&pn=6271c>

6271C TouchCenter

COLOR GRAPHIC TOUCHSCREEN KEYPAD

FEATURES

Event Log

TouchCenter conveniently displays the most recent actions involving system use. A press on the touchscreen is all it takes to access the event log, letting users easily:

- View when the system was used and who used it
- Track when workers and temporary guests use the system
- Keep tabs on family members (e.g., checking if a child has armed the system upon returning home from school)
- Utilize the TouchCenter as an effective business management tool (e.g., viewing openings and closings)



Event Log



System Setup

Keypad

- Emulation of standard 2x16 alpha LCD keypad display
- Diagnostics allows testing of:
 - LCD display
 - Audio
 - LED indicators



Diagnostic Screen



Code Set-Up Screen

Compatibility

Control Panel	Max. No. of 6270/6271
VISTA-15P	2
VISTA-20P	4
VISTA-128BP	3
VISTA-128FBP	3
VISTA-250BP	3
VISTA-250FBP	3

SPECIFICATIONS

Physical

7-1/4" W x 5" H x 1-3/8" D

Wiring

(Standard four-wire connection)

- Black Ground
- Red +12VDC (Aux Power)
- Green "Data in" to control panel
- Yellow "Data out" from control panel

Current Draw

Standby - 180mA
Activated - 280mA

ORDERING

6271C Color Graphic Touchscreen Keypad

Honeywell Security & Custom Electronics

Honeywell
2 Corporate Center Drive Suite 100
P.O. Box 9040
Melville, NY 11747
www.honeywell.com

L/6271CD/D
September 2007
© 2007 Honeywell International Inc.